



■ Dévoiements MODINOX

PLA

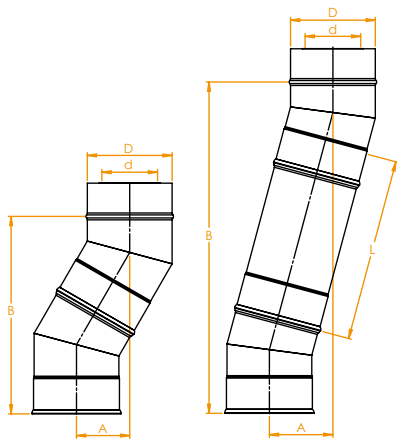


		PLA Dévoiemement à 15°			PLA Dévoiemement à 30°			PLA Dévoiemement à 45°		
		d (mm)	100	130	80	100	130	80	100	130
		D (mm)	125	200	125	153	200	125	153	200
2 coudes	A	41	44	47	85	95	105	134	141	163
	B	315	334	354	317	355	392	324	341	393
2 coudes + L.250	A	91	93	96	180	190	200	315	320	335
	B	498	518	537	482	519	556	459	476	527
2 coudes + L.330	A	111	114	116	220	230	240	325	332	354
	B	575	595	615	551	588	626	515	532	584
2 coudes + L.500	A	155	158	160	305	315	325	445	453	474
	B	740	759	779	698	736	773	635	653	704
2 coudes + L.1000	A	285	287	290	555	565	575	799	806	827
	B	1223	1242	1262	1131	1169	1206	989	1006	1057

PTR30

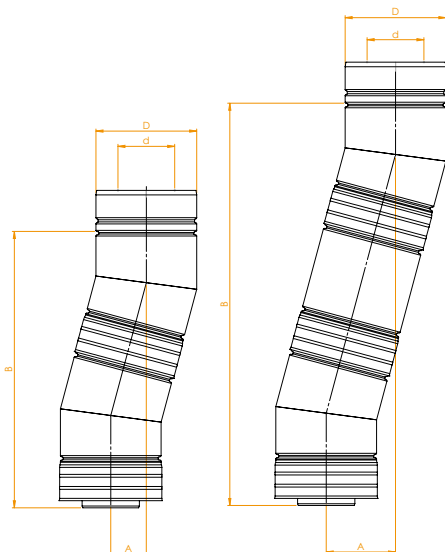


		PTR 30+ Dévoiemement à 15°								
		d (mm)	80	100	130	150	180	200	250	300
		D (mm)	140	160	190	210	240	260	310	360
2 coudes	A	50	50	55	55	55	55	55	55	61
	B	389	389	429	429	429	429	429	429	468
2 coudes + L.250	A	97	97	102	102	102	102	102	102	107
	B	564	564	603	603	603	603	603	603	642
2 coudes + L.330	A	118	118	123	123	123	123	123	123	128
	B	641	641	680	680	680	680	680	680	720
2 coudes + L.500	A	162	162	167	167	167	167	167	167	172
	B	805	805	844	844	844	844	844	844	884
2 coudes + L.1000	A	291	291	296	296	296	296	296	296	301
	B	1288	1288	1327	1327	1327	1327	1327	1327	1367

■ Dévoiements MODINOX

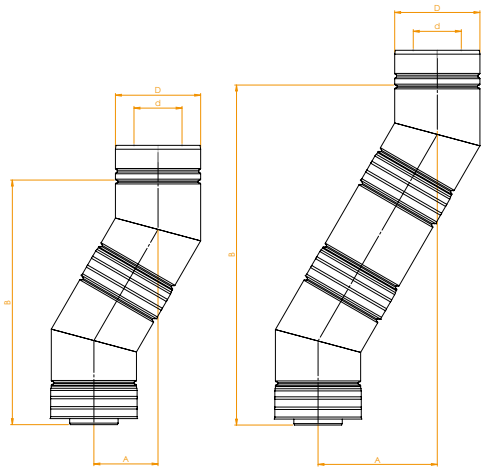


		PTR 30+ Dévoiemement à 30°								
		d (mm)	80	100	130	150	180	200	250	300
		D (mm)	140	160	190	210	240	260	310	360
2 coudes	A	107	117	117	117	127	127	137	137	
	B	407	445	445	445	482	482	519	519	
2 coudes + L.250	A	197	207	207	207	217	217	227	227	
	B	564	601	601	601	638	638	676	676	
2 coudes + L.330	A	237	247	247	247	257	257	267	267	
	B	633	670	670	670	708	708	745	745	
2 coudes + L.500	A	322	332	332	332	342	342	352	352	
	B	780	817	817	817	855	855	892	892	
2coudes + L.1000	A	572	582	582	582	592	592	602	602	
	B	1213	1250	1250	1250	1288	1288	1325	1325	

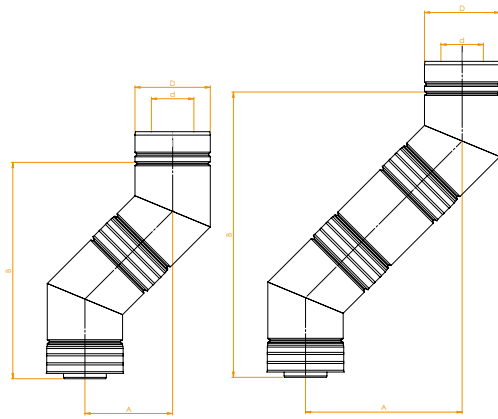

		PTR 30+ Dévoiemement à 45°								
		d (mm)	80	100	130	150	180	200	250	300
		D (mm)	140	160	190	210	240	260	310	360
2 coudes	A	165	179	179	194	194	208	222	236	
	B	407	442	442	476	476	510	544	578	
2 coudes + L.250	A	293	307	307	321	321	335	350	364	
	B	535	569	569	603	603	638	672	706	
2 coudes + L.330	A	3500	364	364	378	378	392	406	420	
	B	592	626	626	660	660	694	728	762	
2 coudes + L.500	A	470	484	484	498	498	512	526	540	
	B	712	746	746	780	780	814	848	883	
2 coudes + L.1000	A	823	837	837	852	852	866	880	894	
	B	1065	1100	1100	1134	1134	1168	1202	1236	

MFI

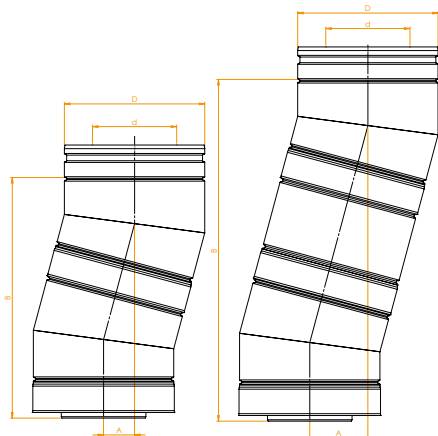

		Dévoiemement à 15°	Dévoiemement à 30°	Dévoiemement à 45°
d (mm)		150	150	150
D int. 2 (mm)		190	190	190
D (mm)		250	250	250
2 coudes	A	55	117	193
	B	428	444	476
2 coudes + L.250	A	104	210	325
	B	608	606	607
2 coudes + L.330	A	124	250	382
	B	686	675	664
2 coudes + L.500	A	168	335	502
	B	850	822	784
2 coudes + L.1000	A	298	585	856
	B	1333	1255	1138


Dimensions des plaques de propreté

PLA

	D int. (mm)	80	100	130
	D (mm)	125	153	200
Droite	A x A	500 x 500	500 x 500	560 x 560
Angle 16 à 23°	B	460	460	530
	C	351	352	394
Angle 24 à 31°	B	460	460	530
	C	654	356	400
Angle 32 à 38°	B	460	460	530
	C	657	359	403
Angle 39 à 45°	B	460	460	530
	C	361	365	411

PTR30

	D int. (mm)	80	100	130	150	180	200	250	300
	D (mm)	140	160	190	210	240	260	310	360
Droite	A x A	500 x 500	500 x 500	560 x 560	560 x 560	600 x 600	600 x 600	680 x 680	680 x 680
Angle 16 à 23°	B	460	460	530	530	580	580	660	660
	C	352	352	394	395	416	417	479	482
Angle 24 à 31°	B	460	460	530	530	580	580	660	660
	C	355	357	398	400	423	424	487	491
Angle 32 à 38°	B	460	460	530	530	580	580	660	660
	C	358	360	402	404	427	429	493	498
Angle 39 à 45°	B	460	460	530	530	580	580	660	660
	C	363	366	410	412	436	439	505	412

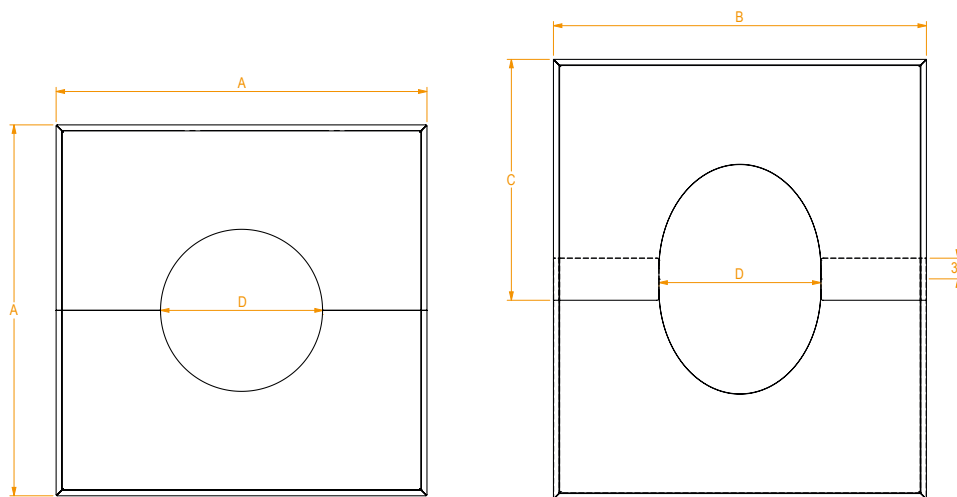

GiDi

	D int. (mm)	153	230
	D (mm)	203	280
Droite	A x A	560 x 560	600 x 600
Angle 16 à 23°	B	530	580
	C	394	418
Angle 24 à 31°	B	530	580
	C	400	425
Angle 32 à 38°	B	530	580
	C	403	431
Angle 39 à 45°	B	530	580
	C	411	441

MFI

	D int. (mm)	150
	D (mm)	250
Droite	A x A	600 x 600
Angle 16 à 23°	B	580
	C	417
Angle 24 à 31°	B	580
	C	423
Angle 32 à 38°	B	580
	C	428
Angle 39 à 45°	B	580
	C	437

Dimensions des rosaces en 2 parties

PLA

	D int. (mm)	80	100	130
	D ext. (mm)	125	153	200
Angle 16 à 23°	A	145	145	145
	B	417	445	492
	C	88	104	131
	D	127	155	202
Angle 24 à 31°	A	145	145	145
	B	417	445	492
	C	96	114	143
	D	127	155	202

	D int. (mm)	80	100	130
	D ext. (mm)	125	153	200
Angle 32 à 38°	A	145	145	145
	B	418	446	493
	C	105	124	157
	D	128	156	203
Angle 39 à 45°	A	145	145	145
	B	418	446	493
	C	117	140	177
	D	128	156	203

PTR30

	D int. (mm)	80	100	130	150	180	200	250	300
	D ext. (mm)	140	160	190	210	240	260	310	360
Angle 16 à 23°	A	125	125	125	125	125	125	125	125
	B	393	413	443	463	494	513	564	615
	C	97	109	126	138	156	167	196	225
	D	143	163	193	213	244	263	314	365
Angle 24 à 31°	A	125	125	125	125	125	125	125	125
	B	393	413	443	463	494	513	564	615
	C	106	119	138	150	170	182	214	247
	D	143	163	193	213	244	263	314	365

	D int. (mm)	80	100	130	150	180	200	250	300
	D ext. (mm)	140	160	190	210	240	260	310	360
Angle 32 à 38°	A	125	125	125	125	125	125	125	125
	B	394	414	444	464	495	514	565	616
	C	116	130	151	165	187	200	236	271
	D	144	164	194	214	245	264	315	366
Angle 39 à 45°	A	125	125	125	125	125	125	125	125
	B	394	414	444	464	495	514	565	616
	C	130	146	170	186	211	226	267	307
	D	144	164	194	214	245	264	315	366

GiDi

	D int. (mm)	153	230
	D ext. (mm)	203	280
Angle 16 à 23°	A	125	125
	B	454	534
	C	133	179
	D	204	284
Angle 24 à 31°	A	125	125
	B	454	534
	C	145	196
	D	204	284

	D int. (mm)	153	230
	D ext. (mm)	203	280
Angle 32 à 38°	A	125	125
	B	455	535
	C	159	215
	D	205	285
Angle 39 à 45°	A	125	125
	B	455	535
	C	179	243
	D	205	285

MFI

	D int. (mm)	150
	D ext. (mm)	250
Angle 16 à 23°	A	125
	B	500
	C	159
	D	250
Angle 24 à 31°	A	125
	B	500
	C	174
	D	250

	D int. (mm)	150
	D ext. (mm)	250
Angle 32 à 38°	A	125
	B	501
	C	191
	D	251
Angle 39 à 45°	A	125
	B	501
	C	216
	D	251

